


# FIBERGLASS TECHNOLOGY

**Décowood®**  
Formula ultra-resistente  
a base di vetro

**Décowood®**  
Ultra-strong glass-based  
special formula

**Questa rivoluzionaria tecnologia è già applicata di standard sulle linee Décowood Classic e Décowood Plus profilo alveolare.**

This revolutionary technology is applied by standard for the lines Décowood Classic and Décowood Plus hollow profile.

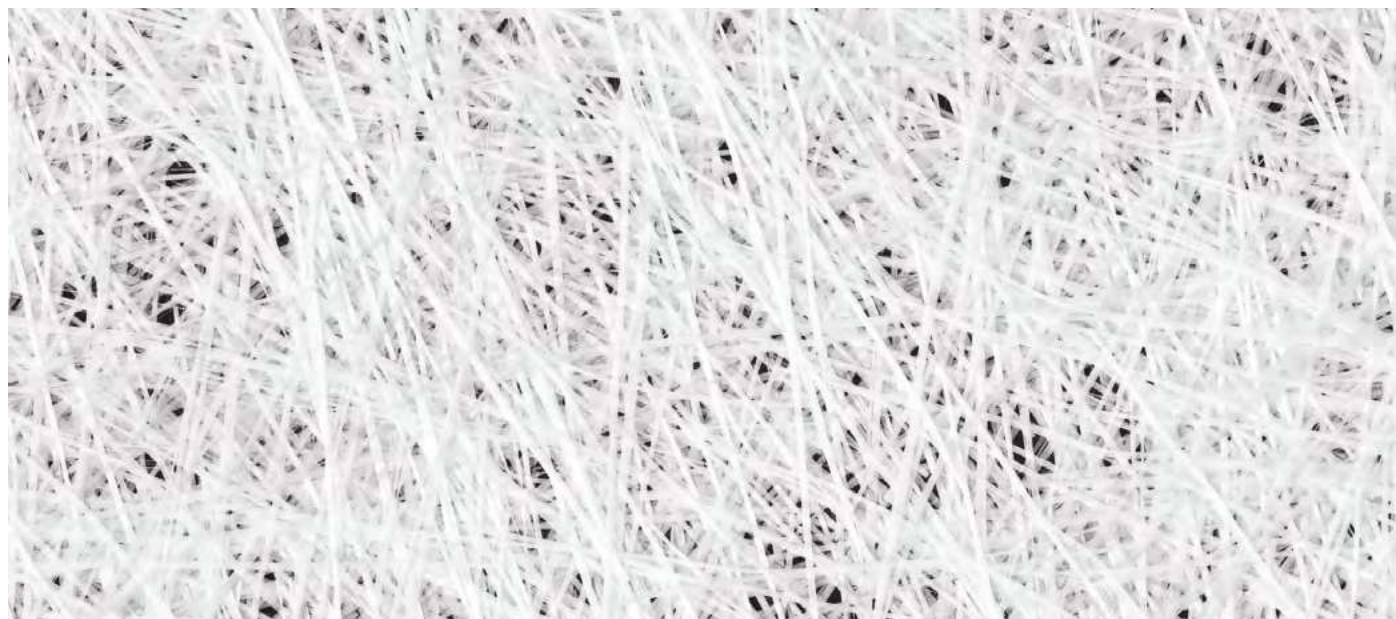

88

CARATTERISTICA FEATURE	RIVESTIMENTO GENERICO GENERIC FLOORING	DÉCOWOOD FORMULA FIBERGLASS DÉCOWOOD FIBERGLASS FORMULA
Carico di rottura Breaking load	3.126 N	4.566 N
Carico di rottura a flessione statica Static bending strength	24.39 N	35.72 N
Modulo di elasticità Modulus of elasticity	3.652 MPa	4.072 MPa
Resistenza all'impatto Impact resistance	3.1 kj/m <sup>2</sup>	4.4 kj/m <sup>2</sup>